





Stal
Ocynk

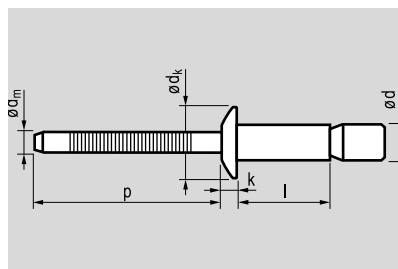

Stal
Ocynk



P-LOCK I wzmocnione I kołnierz standardowy

Ø d	l		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
6,4	14,0	2,0-9,5	17916414						
[+/-0,11]	20,0	2,0-15,9	6420	13,0	≤3,1	~4,00	≥27	10.000	11.700
				[+/-0,35]					
Ø 6,6 [6,9 max]									