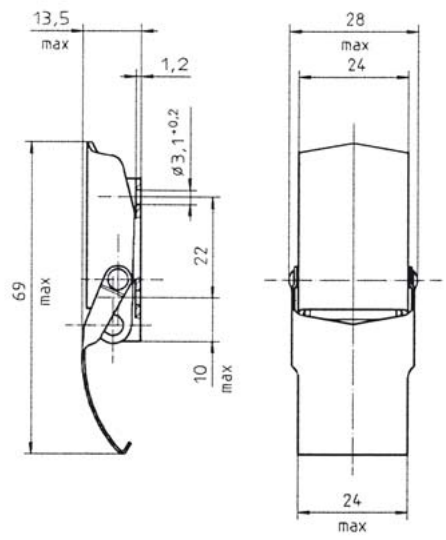
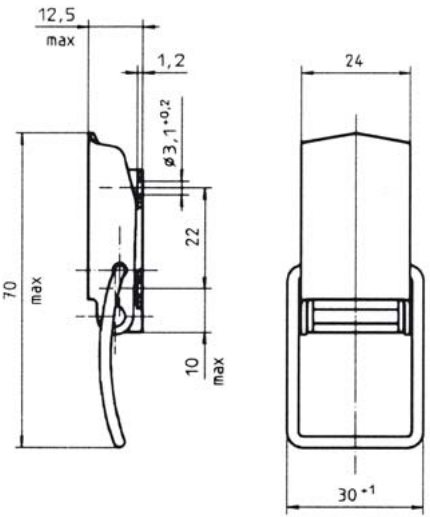


Max. tensile strength 1.500 N, working load up to 1.000 N, see footnotes.

Available with secondary lock



Three different drawhook types available

Style	Dimensions	Materials / Finish	D	Part No.
Spring steel drawhook 		Steel / zinc-plated, CrVI-free, clear passivation ¹⁾	3,1	1429L02-1-1AG
		Stainless steel ²⁾	3,1	1429L02-1-1BP
Wire drawhook 		Steel / zinc-plated, CrVI-free, clear passivation ¹⁾	3,1	1429L02-2-1AG
		Stainless steel ³⁾	3,1	1429L02-2-1BP

¹⁾ Max. tensile strength: 450 N with 1429L8-1AG strike, working load 330 N.

²⁾ Max. tensile strength: 300 N with 1429L8-1BP strike, working load 210 N.



³⁾ Max. tensile strength: 1.500 N with 1429L9-1AG / -1BP strike, working load 1.000 N.

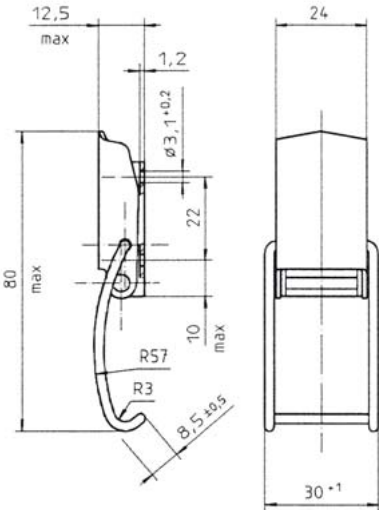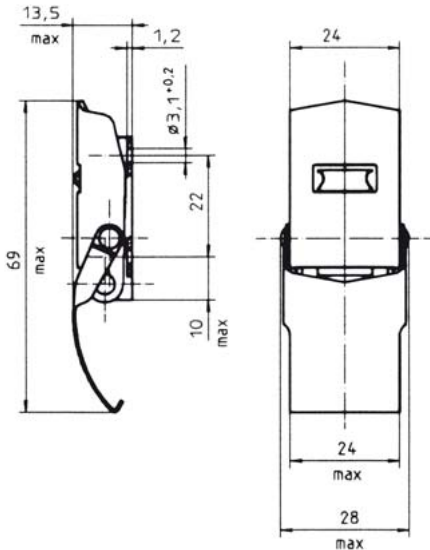Style	Dimensions	Materials / Finish	D	Part No.
Hooked wire drawhook 		Steel / zinc-plated, CrVI-free, clear passivation ¹⁾ Stainless steel ¹⁾	3,1 3,1	1429L02-3-1AG 1429L02-3-1BP
Spring steel drawhook and secondary lock 		Steel / zinc-plated, CrVI-free, clear passivation ²⁾ Stainless steel ³⁾	3,1 3,1	1429L02-1X1AG 1429L02-1X1BP

¹⁾ Max. tensile strength: 1.100 N with 1429L9-1AG / -1BP strike, working load 800 N.
or in conjunction with mating component profile.



²⁾ Max. tensile strength: 450 N with 1429L8-1AG strike, working load 330 N.

³⁾ Max. tensile strength: 300 N with 1429L8-1BP strike, working load 210 N.

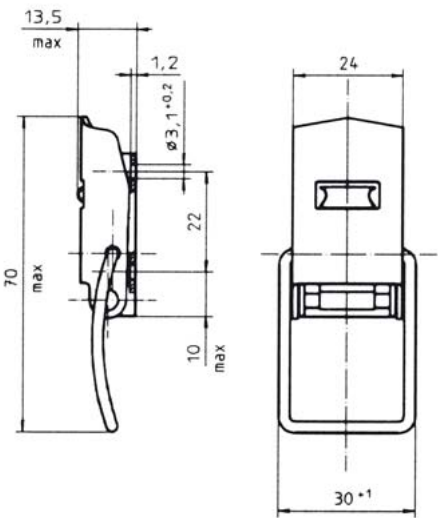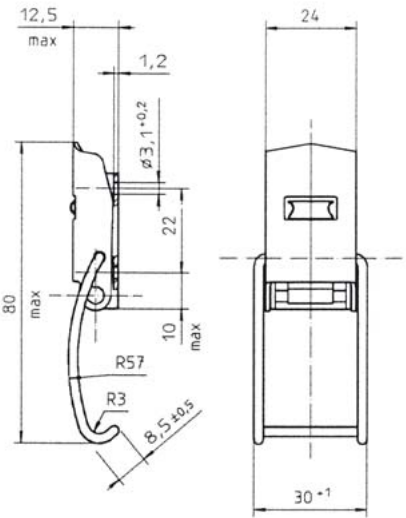Style	Dimensions	Materials / Finish	D	Part No.
Wire drawhook and secondary lock 		Steel / zinc-plated, CrVI-free, clear passivation ¹⁾ Stainless steel ¹⁾	3,1 3,1	1429L02-2X1AG 1429L02-2X1BP
Hooked wire drawhook and secondary lock 		Steel / zinc-plated, CrVI-free, clear passivation ²⁾ Stainless steel ²⁾	3,1 3,1	1429L02-3X1AG 1429L02-3X1BP


¹⁾ Max. tensile strength: max. 1.500 N with 1429L9-1AG / -1BP strike, working load 1.000 N.

²⁾ Max. tensile strength: max. 1.100 N with 1429L9-1AG / -BP strike, working load 800 N.
or in conjunction with mating component profile.

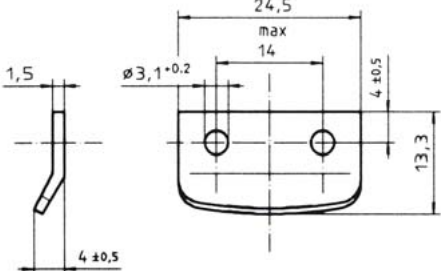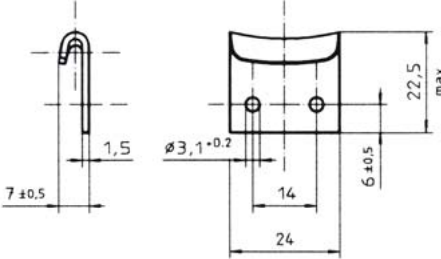
Style	Dimensions	Materials / Finish	D	Part No.
For use with spring steel drawhook 		Steel / zinc-plated, CrVI-free, clear passivation Stainless steel	3,1 3,1	1429L8-1AG 1429L8-1BP
For use with wire drawhook 		Steel / zinc-plated, CrVI-free, clear passivation Stainless steel	3,1 3,1	1429L9-1AG 1429L9-1BP

Dimensions


Spring steel drawhook tension latch / strike

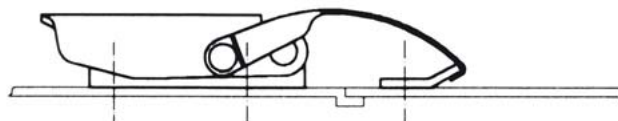


1429L02-1-*
1429L8-*

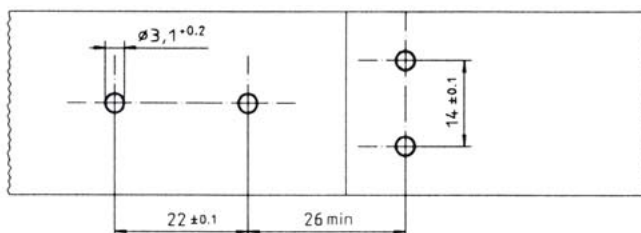


Wire drawhook tension latch / strike

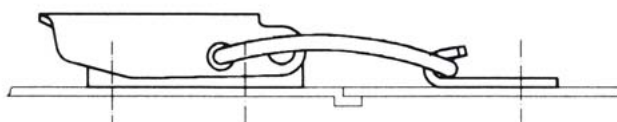

1429L02-2-*
1429L9-*

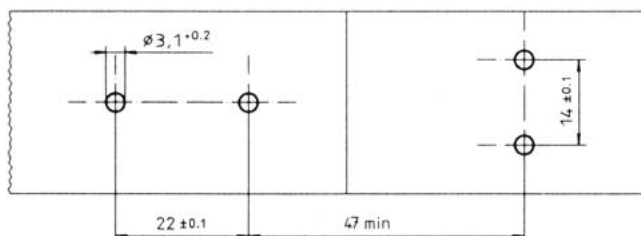

Hokked wire drawhook tension latch / mating component profile

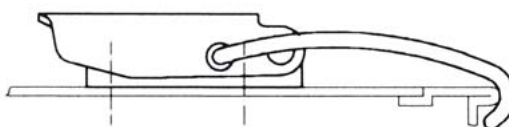

1429L02-3-*
(1429L9-*)

