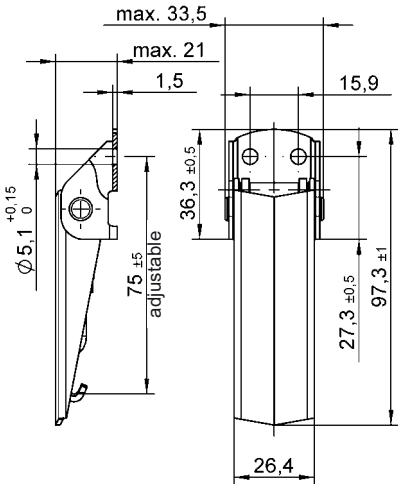
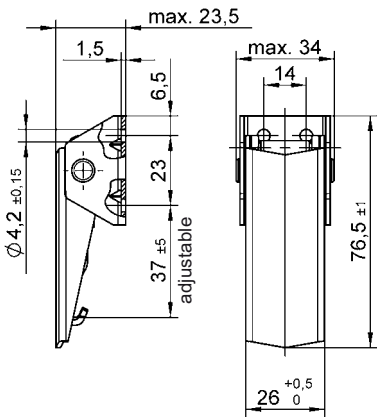


Max. tensile strength 3.600 N, working load max. 2.700 N, see footnotes.

Adjustable drawhook

Available with secondary lock and hasp

Style	Dimensions	Materials / Finish	Mounting Type ¹⁾	D	Part No.
Open base 		Steel / zinc-plated, CrVI-free, clear passivation ²⁾	N	5,1	V917L01-1-1AG
		Stainless steel ³⁾	N	5,1	V917L01-1-1BP
High base 		Steel / zinc-plated, CrVI-free, clear passivation ²⁾	N	4,2	V17L12-1-1AA

¹⁾ Mounting type: N = With hole for riveting or screw fixing




S = Without holes, for welding

²⁾ Max. tensile strength: 3.200 N with V917L11-1- *AG strike, working load 2.200 N.


2.200 N with V951L50-1- *AGV strike, working load 1.500 N.

³⁾ Max. tensile strength: 3.600 N with V951L50-1- *BP strike, working load 2.700 N.



max. 2.300 N with V917L11-1-1BP strike, working load 1.550 N.

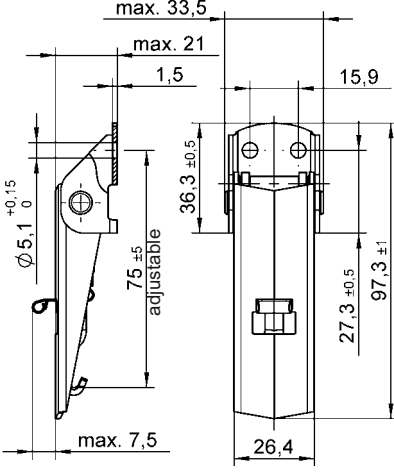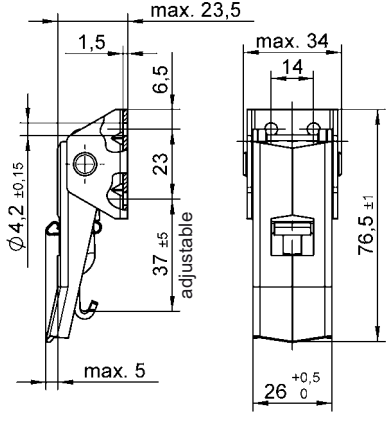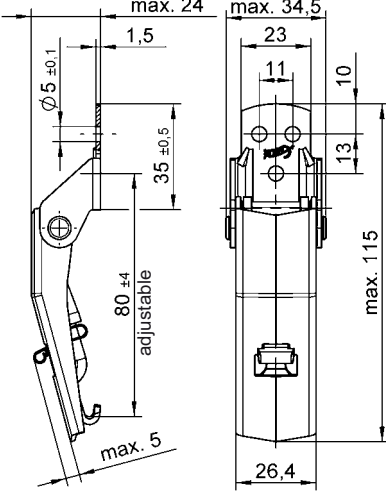Style	Dimensions	Materials / Finish	Mounting Type ¹⁾	D	Part No.
Secondary lock, open base 		Steel / zinc-plated, CrVI-free, clear passivation ²⁾	N	5,1	V917L01-1X1AG
		Stainless steel ³⁾	N	5,1	V917L01-1X1BP
		Stainless steel ³⁾	S	-	V917L01-1X2BP
		Stainless steel V4A ³⁾	N	5,1	V917L01-1X1CP
		Stainless steel V4A ³⁾	S	-	V917L01-1X2CP
Secondary lock, high base 		Steel / zinc-plated, CrVI-free, clear passivation ²⁾	N	4,2	V17L12-2X1AA
Secondary lock, for curved surfaces (R min = 125 mm) 		Steel / zinc-plated, CrVI-free, clear passivation ²⁾	N	5,0	1449L02-1X1AG
		Stainless steel ³⁾	N	5,0	1449L02-1X1BP

For footnotes refer to page G-1.

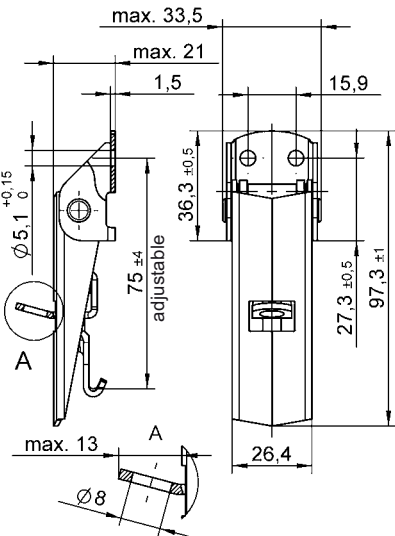Style	Dimensions	Materials / Finish	Mounting Type ¹⁾	D	Part No.
Open base, with hasp 		Steel / zinc-plated, CrVI-free, clear passivation ²	N	5,1	V917L01-1Y1AG


Strikes

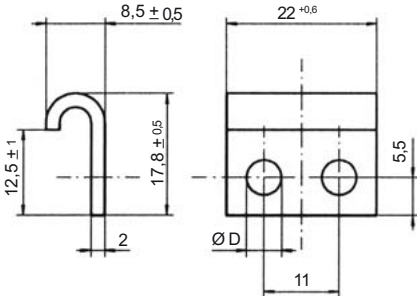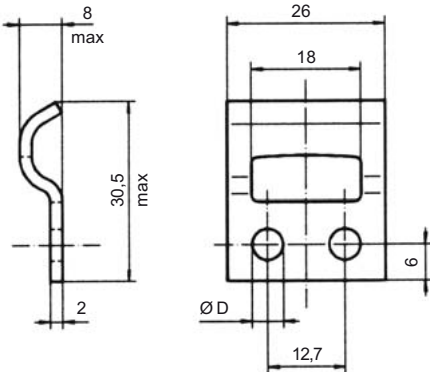Style	Dimensions	Materials / Finish	Mounting Type ¹⁾	D	Part No.
Open 		Steel / zinc-plated, CrVI-free, clear passivation Steel / zinc-plated, CrVI-free, clear passivation Stainless steel	N N N	5,1 4,2 5,1	V917L11-1-1AG V917L11-1-3AG V917L11-1-1BP
Closed 		Steel / zinc-plated, CrVI-free, clear passivation Steel / zinc-plated, CrVI-free, clear passivation Stainless steel Stainless steel	N N N S	4,2 5,1 4,2 -	V951L50-1AGV V951L50-5AGV V951L50-1BP V951L50-3BP

For footnotes refer to page G-1.

Dimensions

Open-base tension latch / open strike

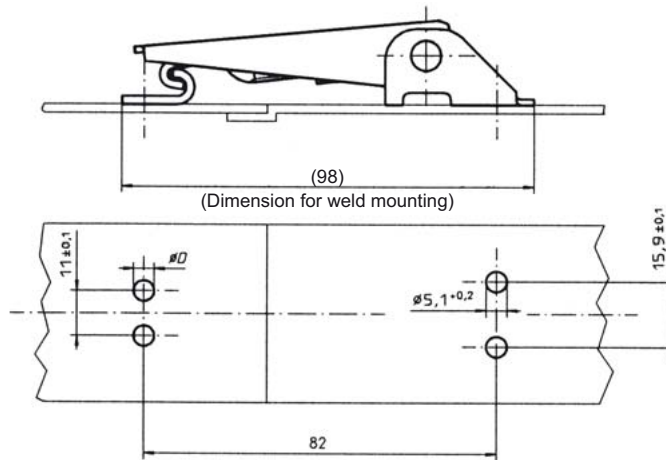


V917L01-

V917L11-

Select diameter D in accordance with the strike style.

Open-base tension latch / closed strike

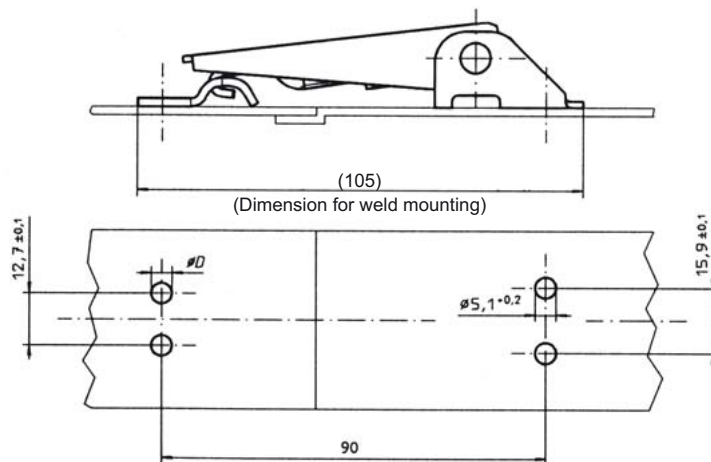


V917L01-

V951L50-

Select diameter D in accordance with the strike style.

Tension latch for curved surfaces

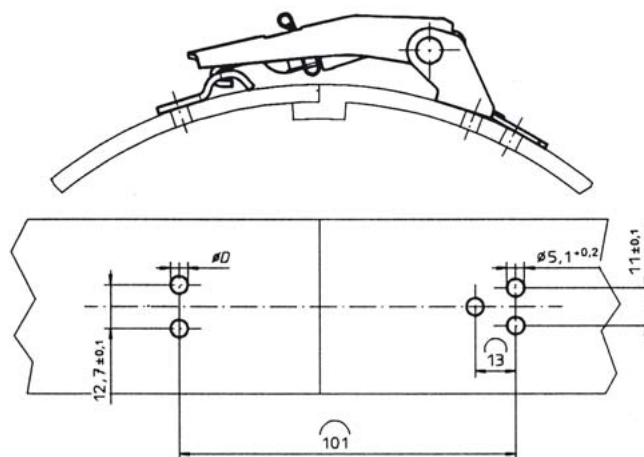


1449L02-

V951L50-

Select diameter D in accordance with the strike style.

Dimensions

High-base tension latch / open strike

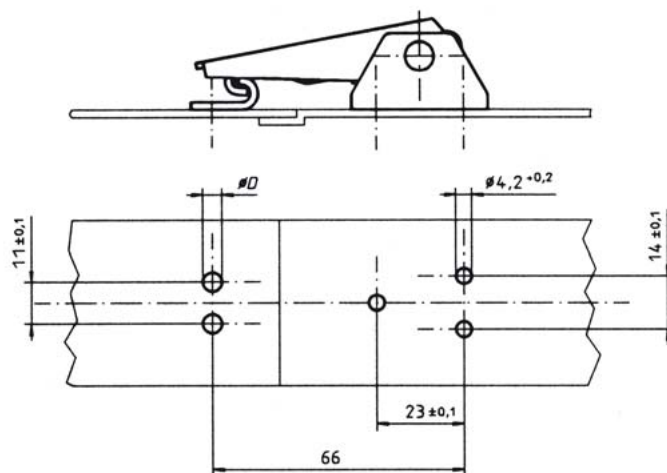

V17L12-

V917L11-

Select diameter D in accordance with the strike style.