


R4-EM Electronic Rotary Latch

Electronic access

- **Auto re-lock and delayed re-lock version**
- **Push-to-close, electronic release**
- **Versatile rotary mechanism**
- **Concealed latching**
- **Microprocessor control**
- **High strength**
- **Minimal power draw**
- **Simple mechanical over-ride**
- **Optional internal microswitch for latch open/close output signal**

The R4-EM Electronic Rotary Latch provides a simple, versatile electromechanical latch solution for a variety of applications. Add a 12-24 Volt DC power supply and any access control device to the R4-EM for a secure, concealed electronic access solution. The optional internal microswitch provides an output signal to remotely monitor latch status or control external systems.

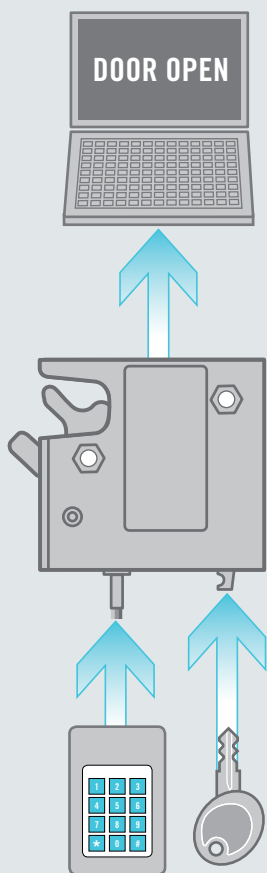


southco®
CONNECT · CREATE · INNOVATE

The efficient DC gear motor driven system releases the rotary cam under heavy loads with minimal power consumption.

The proven rotary mechanism provides push-to-close convenience and a secure closure.

Convenient mechanical over-ride feature for manual release in case of power failure. Contact Southco for manual release cables and mounting brackets





R4-EM Electronic Rotary Latch

Electronic access

southco
CONNECT · CREATE · INNOVATE

Material & Finish

Mechanism

Housing: Steel, zinc plated

Cam, trigger: Steel, zinc plated

Springs: 300 Series stainless steel

Pins: Steel, zinc plated

Electronic Actuator:

Housing: PC/ABS

Cam / follower: Acetal

Electrical Specifications

Recommended Operating Voltage:

12 to 24 Volt DC

Typical Operating Current (average at no load): Less then 600mA at 12 VDC

Input Signal Current Draw: 25mA

MAX at 24 VDC

**Optional microswitch closes upon latch closure

Microswitch Rating: 3A MAX at 12VDC

Wire Color Code / Connector

Pin Assignment:

PIN 1: Brown: Ground (-)

PIN 2: Red: Power 8 to 26 Volts DC

PIN 3: Orange: Control Signal

8 to 26 Volts DC

PIN 4 Black: Microswitch Common

PIN 5 Blue: Microswitch N.O.

Contact

PIN 6 Grey: Microswitch N.C.

Contact

Wire Length: 150mm with connector, 430mm without connector


Contact Southco for mate connector and wire harness

Notes




For mechanical release actuators and cables contact Southco

Parts are shipped individually boxed.

For bulk packaging add -1 to the end of the part number

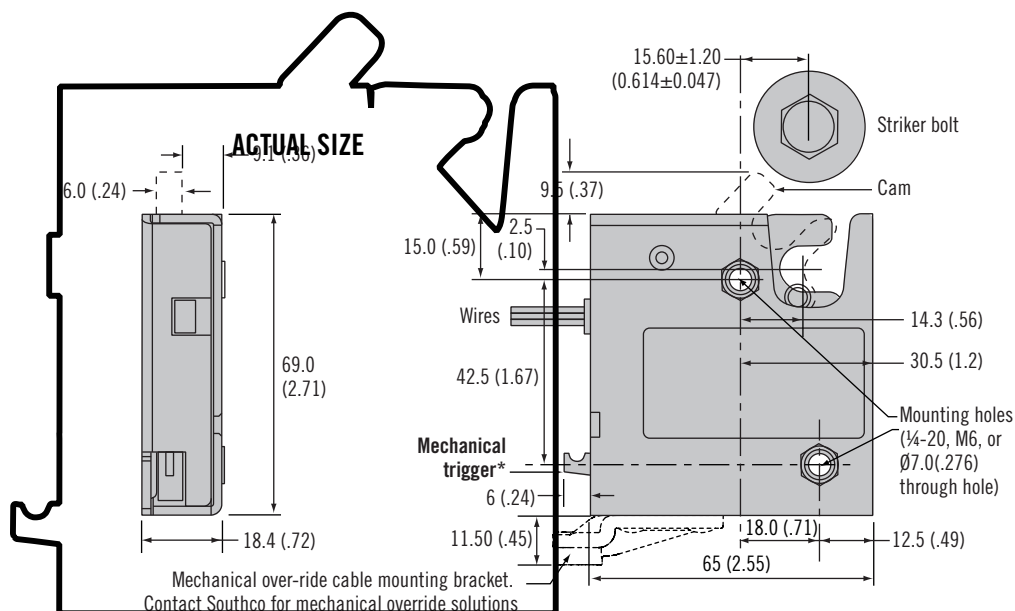


Mounting Kit Rivets included (Part Number R4-EM-52)

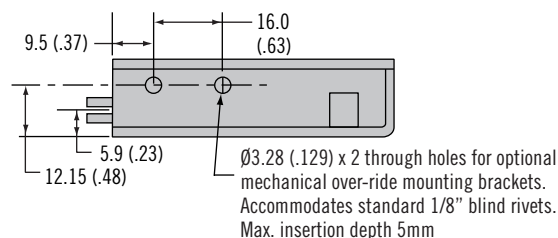


Optional Latch Connector

Molex Microfit 3.0 series




Without connector



Striker Bolt

(order separately)

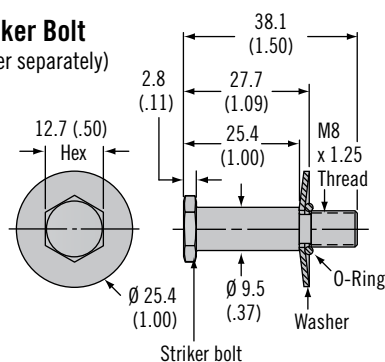


R4EM Part Number				
Type	No Microswitch**		With Microswitch**	
	With connector	Without connector	With connector	Without connector
1/4 - 20 Threaded mounting	R4-EM-X1-131	R4-EM-X1-132	R4-EM-X1-161	R4-EM-X1-162
M6 Threaded mounting	R4-EM-X2-131	R4-EM-X2-132	R4-EM-X2-161	R4-EM-X2-162
Ø 7.0 (.27) Thru hole mounting	R4-EM-X3-131	R4-EM-X3-132	R4-EM-X3-161	R4-EM-X3-162
Striker Bolt Part Number				
Striker bolt	R4-90-121-10			

Operation

Auto Re-lock Version


1. The signal momentarily unlocks and releases the spring loaded cam which rotates out to push a lightweight door open. The latch then immediately returns to the locked state ready to re-lock upon closing
2. Push door closed to engage striker with the R4-EM latch

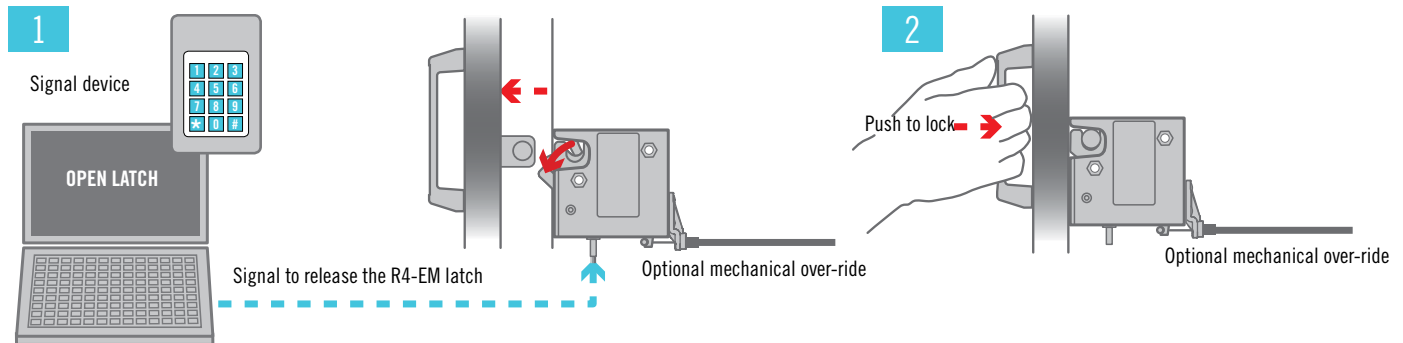

Delayed Re-Lock Version

Use the Delayed re-lock version for heavier doors that will not kick open easily or where remote lock/unlock manual door opening is preferred over a pop open style.

1. The signal unlocks the R4-EM latch leaving a biased closed door in the closed position.
2. Manually pull door/striker free from R4-EM latch
3. Manually push door closed. Striker will rotate cam to closed position, however latch will remain unlocked and can be re-opened as long as signal is present
4. After accessing the door, the signal can be removed to re-lock the R4-EM. This can be done with the door in the open or closed position.

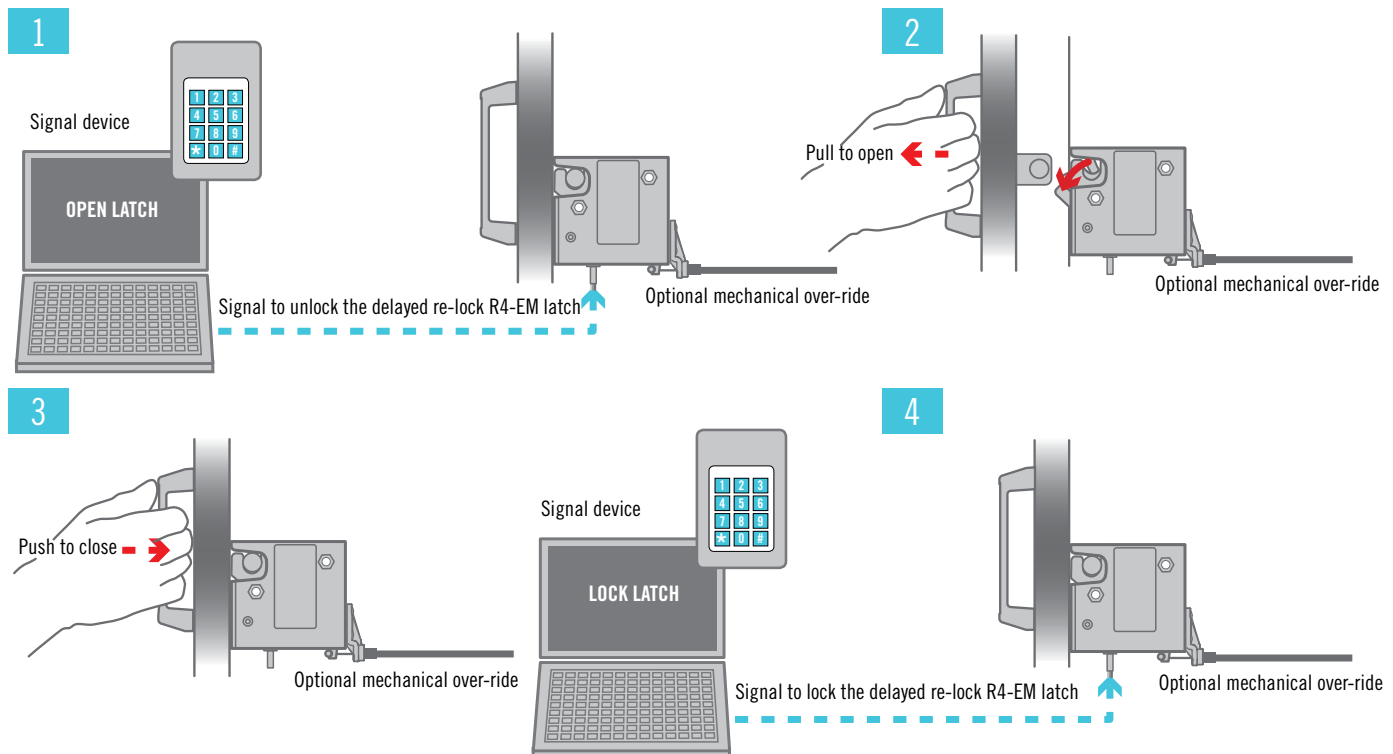



The proven global leader in engineered access solutions

The advantage of 60 years of engineered access hardware and fastener experience lies in our cumulative applications knowledge and engineering expertise that make our broad range of existing solutions possible. In addition, our global manufacturing resources benefit OEMs and CEMs worldwide - no matter where they design, assemble, or sell. Southco offers flexibility and fast response:

- **Engineering assistance on your schedule.** Southco engineering resources in three key regions - North America, Europe, and Asia-Pacific - provide easy access to more than 150 design and sales engineers globally.
- **Quick turnaround, on your timetable.** 14 strategically located Southco manufacturing, assembly, and stocking facilities - in 8 countries across 4 continents - shorten lead times, lower shipping costs, and improve scheduling.
- **Extensive capabilities for your benefit.** In-house resources - stamping, die-casting, cold-heading, roll-forming, turning, injection-molding, and assembly - at Southco Centers of Excellence around the world transform raw stock into polished solutions.
- **Personal assistance, as you need it.** The 24/7 availability of experienced Southco personnel - regardless of geographic location - delivers the timely attention you require.

Whatever your access hardware needs, no one offers more. Contact a Southco representative today, to discover all the possibilities.



Global Corporate Headquarters & Customer and Technical Support Center Concordville, PA · USA

Tel: (1) 610 459 4000
Fax: (1) 610 459 4012

Canada Tel: (1) 905 855 0309

Mexico Tel: (1) 877 821 0666

Manufacturing & Stocking Locations

Chihuahua, Mexico
Concordville, Pennsylvania
Honeoye Falls, New York
Tecate, Mexico
Rockledge, Florida

Europe Customer & Technical Support Center Worcester · UK

Tel: (44) (0) 1905 346722
Fax: (44) (0) 1905 346723

Austria Tel: 0800 281 831

France Tel: 0800 912 756

Germany Tel: 0800 1800 380

Italy Tel: 800 780 953

Spain Tel: 900 968917

Sweden Tel: 020 790 366

UK & NI Tel: 0845 117 9222

Manufacturing & Stocking Locations

Farnham, UK
Worcester, UK

Asia Customer & Technical Support Center Hong Kong · China

Tel: (852) 3127 1503 · Fax: (852) 3127 1541

China Tel: 800 820 0272

Japan Tel: 00531 121672

Korea Tel: 0505 777 1234

Malaysia Tel: 1800 801 119

Singapore Tel: 800 18 11016

Taiwan Tel: 0800 558 015

Australia Customer Service and Distribution Center Tullamarine · Victoria 3043 · Australia

Tel: (61) 03 9330-5000 · Fax: (61) 03 9330 - 5099

India Customer Service and Technical Support Center Taluka Shirur · Pune 412208 · India

Tel: (91) (21) 3867 0538 · Fax: (91) (21) 3867 0588

Manufacturing & Stocking Locations

Hong Kong, China
Shanghai, China
Melbourne, Australia
Shenzhen, China
Pune, India
Tokyo, Japan
Seoul, South Kor

southco®
CONNECT · CREATE · INNOVATE