



24 Cam Latch

Flush T-handle · Adjustable grip

• Concealed mounting type

Material and Finish

Zinc alloy and steel, zinc plated or stainless steel

Performance Details

Maximum static load:
445 N (100 lbf)

Installation Notes

Maximum tightening torque of
mounting nuts not to exceed
2.8 N·m (25 in·lbf)


Keys

See page 130

Other options available. For complete details
on variety, part numbers, installation and
specification, go to



www.southco.com/24

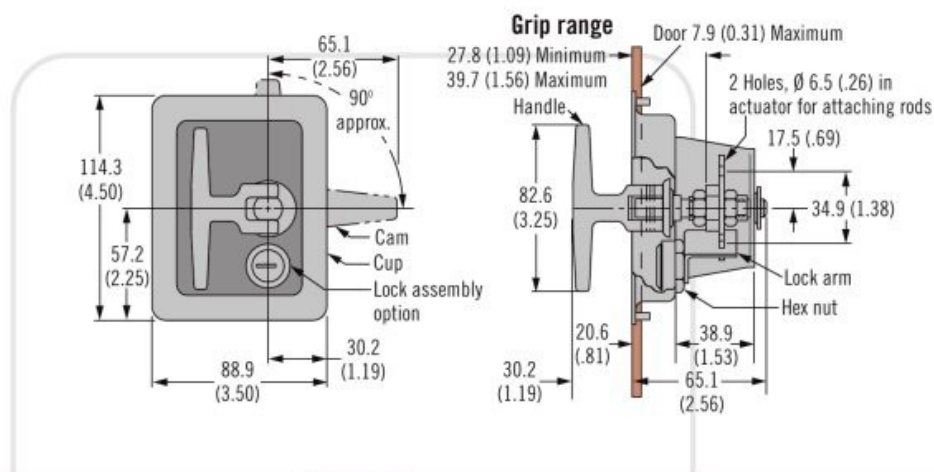

Part Number		
Style	With Mounting Studs	
	Cup and bracket polished stainless steel. Handle zinc chrome plated	Cup and bracket steel dacrotized. Handle zinc dacrotized
Locking keyed alike CH751 supplied	24-20-812-35	24-20-812-10
Non-locking	24-20-302-35	24-20-302-10
Non-locking environmentally sealed	24-20-312-35	24-20-312-10