



V2 Draw Latch

Over-center

southco
CONNECT · CREATE · INNOVATE

- Torsion spring to accommodate application variances

Material and Finish

Stainless steel or steel, zinc plated

Performance Details

Steel

Clamping force:

330 N (75 lbf) Minimum

700 N (160 lbf) Maximum

Stainless Steel


Clamping force:

260 N (60 lbf) Minimum

530 N (120 lbf) Maximum

Notes

Spring loaded anchor plate compensates up to 2.3 (0.09) for irregularities in sealing and gasket set

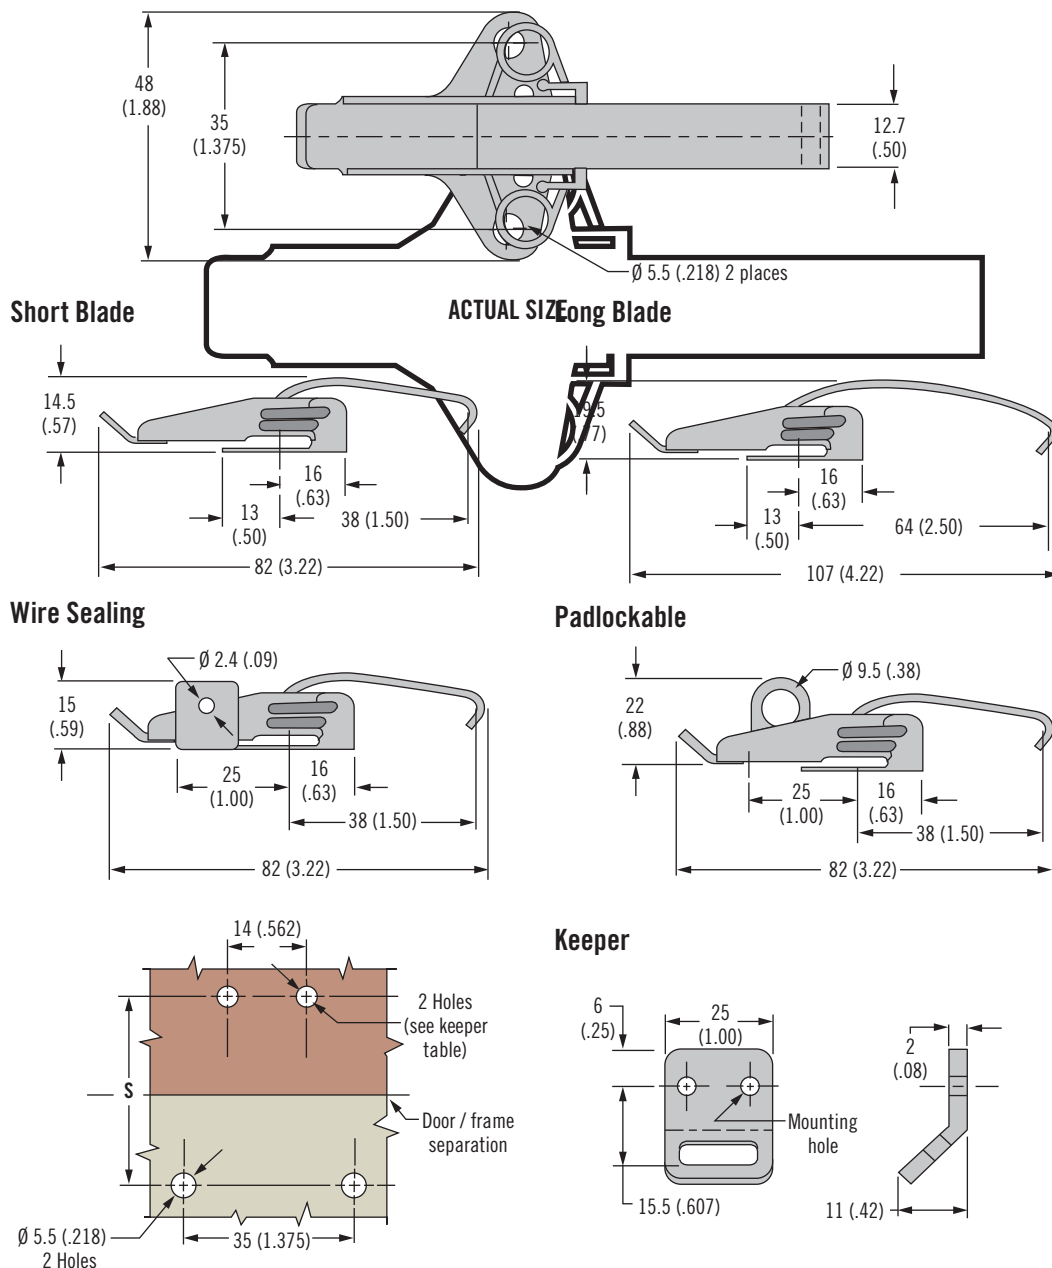


Part Number


See table

Order latch and keeper separately

Description	Style	S Dimension		Part Number	
		Minimum	Maximum	Steel	Stainless Steel
Latch	Short blade	55 (2.17)	57.3 (2.26)	V2-0025-07	V2-0025-52
	Long blade	80.7 (3.17)	83 (3.26)	V2-0068-07	~
	Wire sealing	55 (2.17)	57.3 (2.26)	V2-0034-07	V2-0034-52
	Padlockable	55 (2.17)	57.3 (2.26)	V2-0026-07	V2-0026-52
Keeper	Ø 3.4 (.135) mounting holes			V2-0018-07	V2-0018-52
	Ø 5.5 (.218) mounting holes			V2-0054-07	V2-0054-52

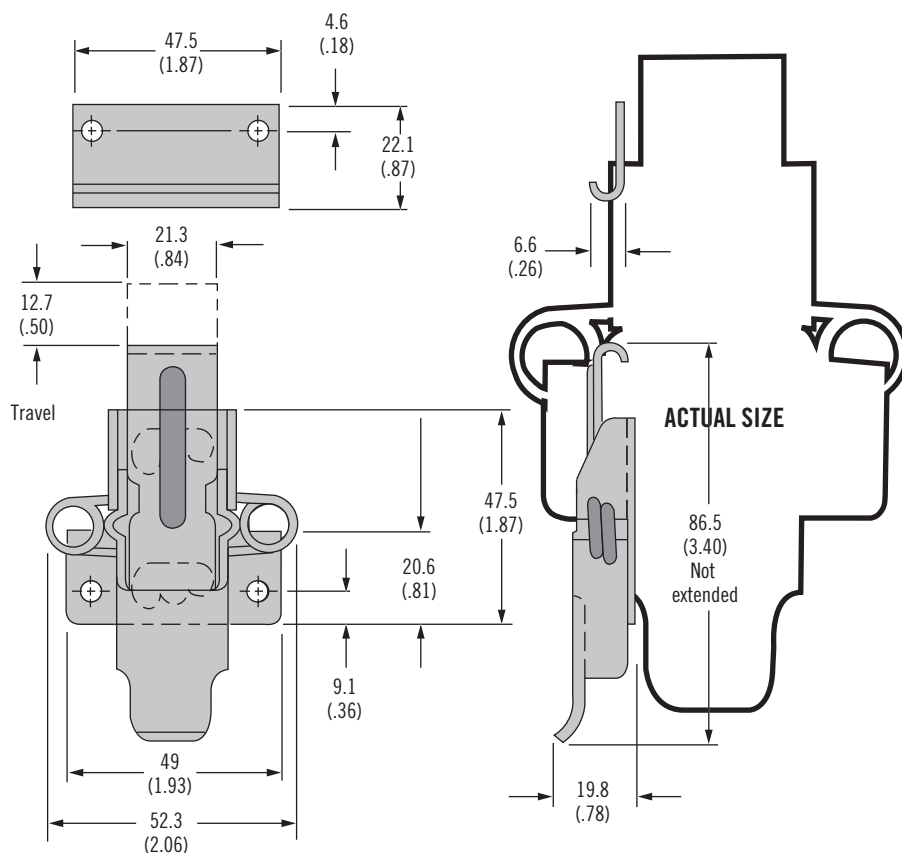


Adjustable Installation

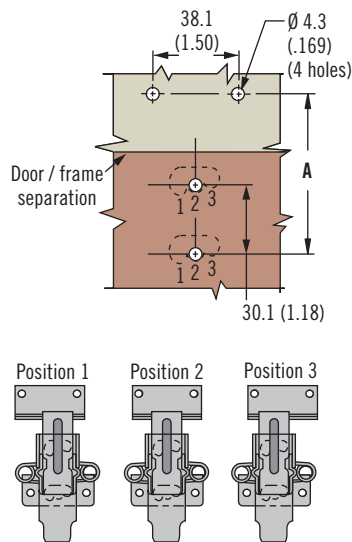

Position Number	Dimensions A	
	Minimum	Maximum
1	71.4 (2.81)	73.7 (2.90)
2	69.9 (2.75)	72.1 (2.84)
3	68 (2.68)	70.6 (2.78)

Fixed Installation



Description	Part Number	
	Steel	Stainless Steel
Latch	V4-0006-02	V4-0006-52
Keeper	V4-0009-02	V4-0009-52

- Torsion spring to accommodate application variances

Material and Finish

Stainless steel or steel, zinc plated

Performance Details

Steel

Average ultimate load:

3500 N (786 lbf)

Stainless Steel

Average ultimate load:

3800 N (850 lbf)

Notes

Spring loaded anchor plate compensates up to 2.3 (.09) for irregularities in sealing and gasket set

