

DM Inserts

Monosert rack attach

southco
CONNECT · CREATE · INNOVATE


- Front install insert for rack attach applications

Material and Finish


Steel, zinc plated

Installation Notes


Max. tightening torque:
2 N·m (17.7 in·lbf)

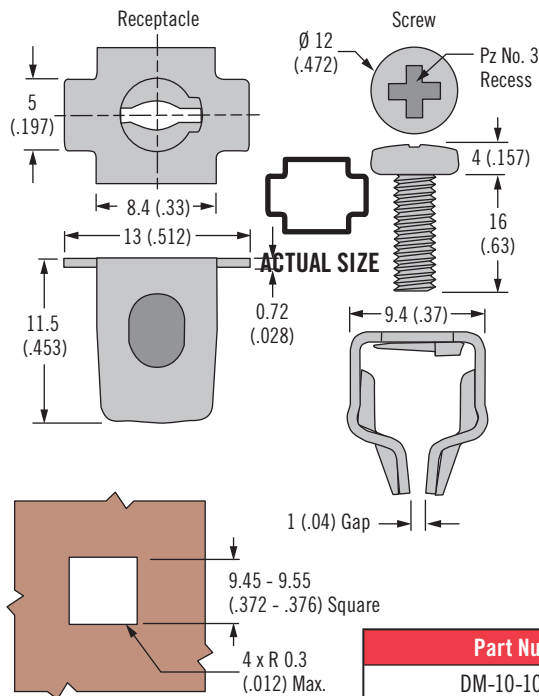

Standard Installation

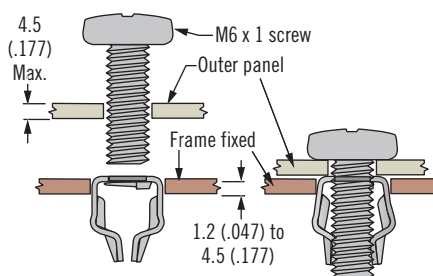

Alternative Installation

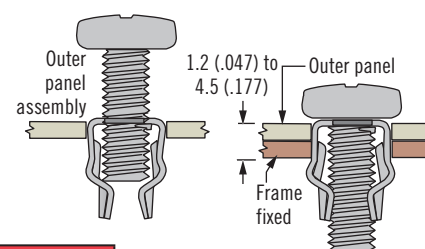

DM Inserts

Duosert rack attach

- Front install insert for rack attach applications

Material and Finish

Zinc alloy and stainless steel,
natural

Installation Notes

Max. tightening torque:
10 N·m (88.5 in·lbf)

Max. panel thickness:
1 - 1.2 (.039 - .047)

Recommended installation tool
requires a flat blade screwdriver

