

Pneumatic screwdrivers

Direct Drive Screwdrivers



S2305



S2480

Direct Drive Screwdrivers are suitable for self-drilling and wood screws. The tools are well balanced and quiet. A soft-start trigger ensures smooth operation and the air exhaust is adjustable through 360 degrees.

Impact Drive Screwdrivers are lightweight tools offering a productive blend of operator comfort and exceptional performance. There are two models – both are reversible with a simple flip-off lever on the side of the tool handle.

Model	Bolt size mm	Quick change chuck in	Torque range Nm	Free speed r/min	Weight kg	Length mm	Air cons. l/s	Rec. hose size mm	Air inlet thread BSP	Ordering No.
Impact drive										
S2480	M5	1/4"	6-13	6500	0.8	132	10	10	1/4"	8431 0257 90
Direct drive										
S2305	M8	1/4"	0-12	750	0.9	198	5.6	8	1/4"	8431 0257 28
S2326	M6	1/4"	0-4.5	2400	0.8	178	5.6	8	1/4"	8431 0257 36

Pneumatic screwdrivers



S2308-C / S2310-C

Shut-off Screwdrivers

Shut-off Screwdrivers offer impressively high torque accuracy. Our fast shut-off models deliver smooth performance and high quality tightening.

Slip-Clutch Screwdrivers provide an implied pulsating force, or slip, once you reach the desired torque.

Both versions feature adjustable torque settings, trigger and push start for pistol grips, and lever and push start for straight models.



S2450-P / S2452-P



S2340-C / S2360-C / S2370-C



S2416-L / S2426-L / S2428-L

Model	Screw capacity mm	Quick change chuck in	Torque range Nm	Free speed r/min	Weight kg	Length mm	Air cons. at free speed l/s	Rec. hose size mm	Air inlet thread BSP	Starting method			Ordering No.
										Push	Push and trigger/lever	Trigger/lever	
Slip clutch													
S2308-C	M6	1/4"	2.5-11	950	1.1	225	8.4	10.0	1/4"	-	•	-	8431 0257 20
S2310-C	M5-8	1/4"	2-15	800	1.1	225	8.5	10.0	1/4"	-	•	-	8431 0257 24
S2307-CE	M6	1/4"	2.5-10	900	1.2	245	8.4	10.0	1/4"	-	-	•	8431 0257 26
S2340-C	M3	1/4"	0.5-2	1300	0.9	250	4.0	6.3	1/4"	-	•	-	8431 0257 40
S2360-C	M4-5	1/4"	1.3-7	700	0.9	260	4.0	6.3	1/4"	-	•	-	8431 0257 60
S2370-C	M5	1/4"	2-6	1300	0.9	250	4.0	6.3	1/4"	-	•	-	8431 0257 70
Shut off													
S2426-L	M4	1/4"	1.2-2.6	1500	0.9	230	6.0	8.0	1/4"	-	•	-	8431 0257 80
S2428-L	M4-5	1/4"	3.5-7	700	1.0	242	6.0	8.0	1/4"	•	-	-	8431 0257 81
S2416-L	M3	1/4"	0.5-1.6	1500	0.9	230	6.0	8.0	1/4"	-	-	•	8431 0257 82
S2450-P	M5	1/4"	2.4-5	1100	1.1	225	6.0	8.0	1/4"	-	-	•	8431 0257 84

S2307-CE external adjustable clutch. The slip clutch tool needs the lever to be pressed. Then push down in order for the bit to tighten.

Electric screwdrivers

Handheld

The S8 series offers a wide variety of screwdrivers that give great speed and high precision.

Built with an ergonomic design, the low torque screwdriver S8 offers a plug & play solution for your assembly needs. The S8 series is designed to deliver great quality and increase efficiency.

- **Industrial design:** Ergonomic design for easy operator handling
- **High durability:** Build to last
- **Brushless motor:** Providing long service intervals
- **Plug & play:** Simple start-up process
- Controllers and tools are ordered separately.




S8050



S8050



S8050

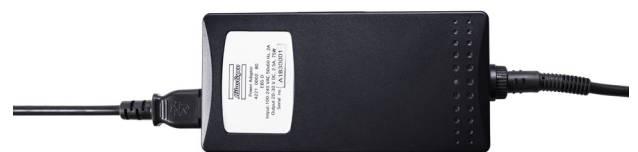

EBS D

Model	Bit drive	Torque range min - max lb in	Torque range min - max cNm	Free speed r/min	Weight kg	Weight lbs	Ordering No.
S8020	1/4"Hex	0.26-1.7	3-20	700-1000	0.46	1.01	4221 0002 73
S8020-WS	Wing shank 4 mm	0.26-1.7	3-20	700-1000	0.46	1.01	4221 0002 72
S8050	1/4" Hex	0.43-4.3	5-50	700-1000	0.46	1.01	4221 0002 74
S8120	1/4" Hex	1.3-10.4	15-120	700-1000	0.46	1.01	4221 0002 75
S8120-2000	1/4" Hex	1.3-10.4	15-120	1400-2000	0.46	1.01	4221 0002 76
S8160	1/4" Hex	1.7-13.9	20-160	700-1000	0.46	1.01	4221 0002 77
S8200	1/4" Hex	3.5-17.4	40-200	700-1000	0.46	1.01	4221 0002 78
S8250	1/4" Hex	4.3-21.7	50-250	500-750	0.46	1.01	4221 0002 79
Power supply							
EBS D					0.38	0.84	4221 0002 80

NOTE: Power supply needs to be ordered separately.