




**Stal**  
Ocynk



## Otwarte | kołnierz wpuszczany mini

| Ø d                                                                                                                     | l<br>[+0,5/-0] |  | Indeks nr      | Ø dk<br>[+0/-0,5] | k<br>≤     | SW           |  |  |  |
|-------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------------------------------------------------------------------|----------------|-------------------|------------|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| [mm]                                                                                                                    | [mm]           | [mm]                                                                              |                | [mm]              | [mm]       | [mm]         | [Nm]                                                                                | [N]                                                                                 | [N]                                                                                 |
| <b>M4</b>                                                                                                               | 11,0           | 0,5-2,5                                                                           | BS04SOMC25     | 7,0               | 0,5        | 5,9          | -                                                                                   | -                                                                                   | -                                                                                   |
| <br>SW1 6,0                            | 13,5           | 3,0-5,0                                                                           | 50             | 7,6               | 0,8        |              |                                                                                     |                                                                                     |                                                                                     |
| <b>M5</b>                                                                                                               | 14,5           | 0,5-3,0                                                                           | BS05SOMC30     | 8,0               | 0,5        | 6,9          | -                                                                                   | -                                                                                   | -                                                                                   |
| <br>SW1 7,0                           | 15,5           | 3,5-5,0                                                                           | 50             | 8,9               | 0,8        |              |                                                                                     |                                                                                     |                                                                                     |
| <b>M6</b>                                                                                                               | 16,0           | 1,0-3,5                                                                           | BS06SOMC35     | 10,0              | 0,6        | 8,9          | -                                                                                   | -                                                                                   | -                                                                                   |
| <br>SW1 9,0                          | 18,0           | 3,0-6,0                                                                           | 60             | 10,0              | 0,6        |              |                                                                                     |                                                                                     |                                                                                     |
| <b>M8</b>                                                                                                               | 18,0           | 1,0-4,0                                                                           | BS08SOMC40     | 12,0              | 0,6        | 10,9         | -                                                                                   | -                                                                                   | -                                                                                   |
| <br>SW1 11,0                         | 20,0           | 3,0-6,0                                                                           | 60             | 12,0              | 0,6        |              |                                                                                     |                                                                                     |                                                                                     |
| <b>M10</b>                                                                                                              | 19,0           | 0,5-3,5                                                                           | BS10SOMC35-12  | 14,5              | 1,0        | 11,9         | -                                                                                   | -                                                                                   | -                                                                                   |
| <br>SW1 12,0<br>SW1 13,0<br>SW1 13,0 | 19,0<br>22,5   | 0,5-3,5<br>4,0-6,0                                                                | 35-13<br>60-13 | 14,5<br>14,5      | 1,0<br>1,1 | 12,9<br>12,9 |                                                                                     |                                                                                     |                                                                                     |
| <b>M12</b>                                                                                                              | 22,5           | 1,0-4,0                                                                           | BS12SOMC40-15  | 17,5              | 1,1        | 14,9         | -                                                                                   | -                                                                                   | -                                                                                   |
| <br>SW1 15,0<br>SW1 16,0             | 25,0           | 1,0-4,0                                                                           | 40-16          | 17,5              | 1,1        | 15,9         |                                                                                     |                                                                                     |                                                                                     |

W ofercie nitonakrętki o niestandardowych wymiarach.

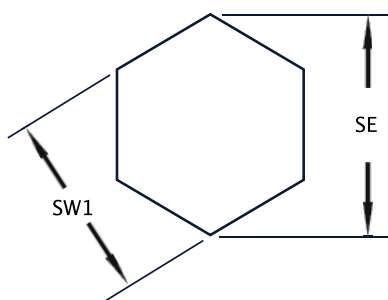

**SW:** Wymiar zewnętrzny nitonakrętki bok do boku

**SW1:** Wymiar wewnętrzny nitonakrętki bok do boku

**SE:** Wymiar wewnętrzny nitonakrętki wierzchołek do wierzchołka