




Aluminium [AlMg3]

Polerowany



Stal nierdzewna [A2]

Polerowany

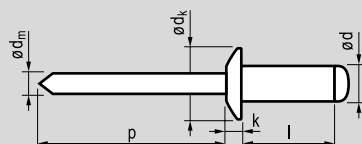

Otwarte | kołnierz standardowy

Ø d	l		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[+1/-0,2]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,0	6,0	1,5-3,5	AA10713006	6,5 [+0/-0,7]	0,8 [+/-0,2]	~1,75	≥27	810	620
[+0,08/-0,10]	8,0	3,5-5,5	3008						
	10,0	5,5-7,0	3010						
Ø 3,1	12,0	7,0-9,0	3012						
3,2	6,0	1,5-3,5	AA10713206	6,5 [+0/-0,7]	0,8 [+/-0,2]	~1,95	≥27	980	760
[+0,08/-0,10]	8,0	3,5-5,5	3208						
	10,0	5,5-7,0	3210						
Ø 3,3	12,0	7,0-9,0	3212						
4,0	6,0	1,0-3,0	AA10714006	8,0 [+0/-1,0]	1,0 [+/-0,3]	~2,10	≥27	1.600	1.200
[+0,08/-0,15]	8,0	3,0-5,0	4008						
	10,0	5,0-7,0	4010						
Ø 4,1	12,0	7,0-9,0	4012						
4,8	8,0	2,5-4,5	AA10714808	9,5 [+0/-1,0]	1,1 [+/-0,3]	~2,70	≥27	2.230	1.690
[+0,08/-0,15]	10,0	4,5-6,5	4810						
	12,0	6,5-8,5	4812						
Ø 4,9	14,0	8,5-10,5	4814						
	16,0	10,5-12,5	4816						
	18,0	12,5-14,5	4818						
	20,0	14,5-16,5	4820						
5,0	8,0	2,5-4,5	AA10715008	9,5 [+0/-1,0]	1,1 [+/-0,3]	~2,70	≥27	2.500	2.000
[+0,08/-0,15]	10,0	4,5-6,5	5010						
	12,0	6,5-8,5	5012						
Ø 5,1	16,0	10,5-12,5	5016						

W ofercie nity o niestandardowych wymiarach.